

FIP15G Plus

Elite Touch Screen IP Phone

Flyingvoice FIP15G Plus is a premium communication tool for executives and professionals who want to improve business efficiency. The phone adopts a brand-new quad-core processor and a 4.3-inch IPS touchable display to provide an intuitive interface and a better viewing experience for users. Featuring improved mobility features such as built-in dual-band Wi-Fi and Bluetooth, and dual USB ports, the FIP15G Plus allows you to effectively manage calls for easy remote collaboration. Moreover, it includes wideband Codec G.722 and Opus to ensure HD voice quality in every call for a better calling experience.



Eye-catching Screen, Intuitive to Use

With a 4.3-inch IPS touchable display, Flyingvoice FIP15G Plus provides a broad visual angle to check out information and images in full-color saturation, while delivers a concise user interface for easy operation.

HD Voice Quality, Better Calling Experience

The FIP15G Plus IP phone features advanced voice technologies such as Wideband Codec G.722, Opus, Acoustic Shield and ANC to block out annoying noises from the environment for superior voice quality. Based on a quad-core processor, the FIP15G can run faster and smoothly in any move, bringing more convenience to users.

Strong Wi-Fi Signal, Increased Mobility

Equipped with built-in 2.4GHz & 5 GHz Wi-Fi and Bluetooth, Flyingvoice FIP15G Plus not only supports high-quality calls with 5G Wi-Fi connectivity in any size building, but enables Bluetooth wireless headset, which allows you to move around when on a call, and no more missed calls when you leave your desk.

Dual USB ports, Expanded Functions

Dual USB ports for additional functions such as EHS10 headset adapters for DECT wireless headsets, USB earphones, or USB disks for call recording and more, giving you more customization in various usage scenarios.

Cloud Platforms, Easy Configuration

FIP15G Plus installed centralized firmware can be simple to deploy and manage by Flyingvoice's online platforms including FACS and FRPS, and auto-provisioning modes FTP/TFTP/HTTP/HTTPS/TR069, making mass deployment extremely easy.



- 4.3" 480*272px IPS touch screen
- 10 SIP accounts
- 64 DSS/BLF keys
- Built-in 2.4GHz & 5GHz Wi-Fi
- Built-in Bluetooth 4.2
- 2 x Gigabit Ethernet port
- Integrated PoE
- 2 x USB ports
- USB call recording(Auto/Manual)
- Supports wired/wireless headsets
- Wideband codec G.722, Opus
- Wall mountable

Audio Features

- > HD voice: HD handset, HD speaker
- > Wideband Codec: G.722, Opus, AMR-WB(Optional), G.711WB(Optional)
- > Narrowband Codec: G.711(A/u), iLBC, G.729A/B, G.723, G.723.1, G.726, AMR-NB(Optional)
- > DTMF: In-band, RFC 2833, SIP INFO
- > Full-duplex hands-free speakerphone
- > VAD, CNG, AEC, ANC, AGC, PLC, AJB, DRC

Phone Features

- > 10 SIP accounts
- > Mute, DND, auto answer, redial, speed dial, hotline
- > Call hold, call transfer (attended/blind), call waiting, call forward
- > SIP message
- > 6-way conferencing
- > Direct IP call without SIP proxy
- > Set date time manually or automatically
- > dial rules
- > XML browser, XML push
- > RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > IP conflict detection
- > Built-in Bluetooth 4.2(8k sampling rate)
- > Built-in 2.4GHz & 5GHz Wi-Fi
- > USB port (2.0 compliant) for:
 - USB call recording
 - EHS10 wireless headset adapter
- > Up to 64 DSS/BLF keys

Directory

- > Phone book (2000 records, support Chinese search)
- > Black list
- > XML/LDAP remote phonebook
- > Phonebook search/import/export
- > Call history: all/missed/dialed/received (60 records)

IP-PBX Features

- > BLF
- > Anonymous call, anonymous call rejection
- > Call park, call pickup, voice mail
- > Paging, intercom, Message waiting indicator (MWI)
- > Call recording on server

Display and Indicator

- > 4.3" 480 x 272px color IPS screen with backlight
- > 16bit depth color
- > LED for call and message waiting indication
- > Dual-color (red/green) illuminated LEDs for line, status information
- > Intuitive user interface with icons and soft keys, wallpaper
- > 17 languages
- > Caller ID with name and number
- > Power saving mode

Feature Keys

- > 10 Line keys (touchable)
- > 4 soft keys (touchable)
- > 3 features keys: headset, mute, hands-free speakerphone
- > Volume + / -

Interface

- > 2x RJ45 Ports (Ethernet 10/100/1000 Base-T)
- > Support PoE (IEEE 802.3af), class 3
- > 1 x RJ9 Handset port
- > 1 x RJ9 Headset port
- > 2 x USB 2.0 port
- > 1 x Power adapter

Others

- > Color: Classic grey
- > Wall mountable
- > AC/DC Adapter
 - AC Input: 100~240V, 50~60Hz
 - DC Output: 5V, 2A
- > Power consumption (PSU): 1.8-6.2W
- > Power consumption (PoE): 3.5-9.2W
- > Dimension (W x H x D x T) : 190mm x 188.5mm x 173mm x 42.5mm
- > Relative humidity: 10%~90% (No Condensing)
- > Storage temperature: -20~ 70°C
- > Operation temperature: 0~45°C

Management

- > Configuration: browser/phone/auto-provision
- > FTP/TFTP/HTTP/HTTPS for Auto Provisioning
- > Zero-configuration, TR069 (TR104/TR106)
- > FACS (Flyingvoice Auto-Configuration System)
- > Reset to factory, reboot
- > Package tracking
- > System logs viewing and downloading

Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT Traversal by STUN
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: Static IP and DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > SDP (RFC 2327), UDP/TCP
- > DSCP, 802.1p QoS, SRTP, TLS
- > HTTPS certificate manager
- > Digest authentication
- > OpenVPN
- > IEEE802.1X
- > IPv4 /IPv6, Dual stack IPv4/IPv6
- > PPPoE
- > RTP/RTCP (RFC 1889, RFC 1890)
- > ARP/RARP (RFC 826/903)
- > LLDP/CDP/DHCP VLAN
- > DNS/DNS SRV/DNS NAPTR
- > SSH

Package Contents

- > Flyingvoice FIP15G Plus IP Phone
- 1 x Handset with handset cord
- 1 x Ethernet cable
- 1 x Stand
- Quick start guide
- Power adapter (Optional)


Weight&Size

- > N.W/PCS: 0.77kg
- > G.W/PCS: 1.00kg
- > QTY/CTN:10, G.W/CTN: 10.90kg
- > Gift box size: 270mm x 195mm x 78mm
- > Carton size: 410mm x 410mm x 290mm

Certificated by



Compatible with

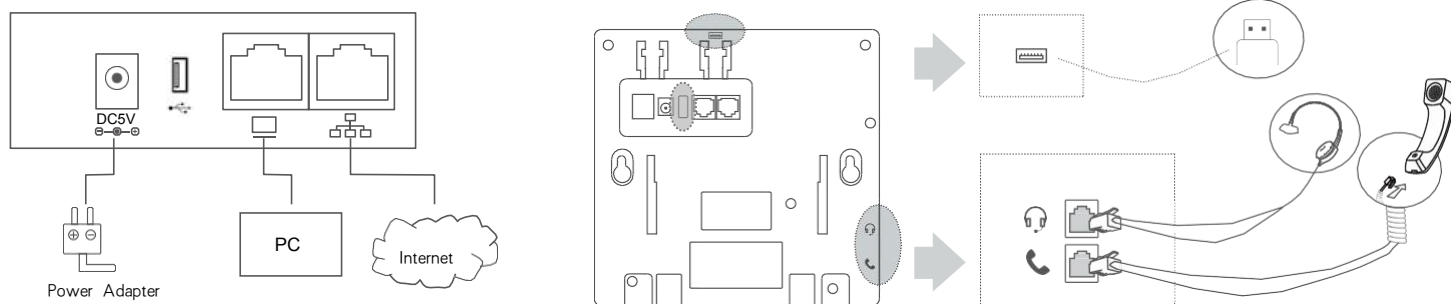

About Flyingvoice

Flyingvoice is a leading manufacturer of VoIP phones, VoIP adapters and VoIP routers, which are widely used throughout the world and highly praised by international carriers, ITSP, ISP and company users.

Driven by ongoing innovation of VoWLAN, Flyingvoice is committed to making easier VoIP products by enabling the enterprise network and united communication. Our people are continuously improving our products and expanding product applications tailored to clients' requirements, which make you collaborate securely, effectively and efficiently – anytime & anywhere.

Copyright

Copyright © Flyingvoice Network Technology Co., Ltd. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Flyingvoice Network Technology Co., Ltd.

Technical Support

Visit www.flyingvoice.com for product documents and FAQ, or contact Flyingvoice by email at support@flyingvoice.com. We'll get you the help you need.



Flyingvoice Network Technology Co., Ltd.

Website: www.flyingvoice.com

Add: 1801-1802, Building 1, Chongwen Park, Nanshan Zhiyuan, Nanshan District, Shenzhen, China

Copyright© Flyingvoice Network Technology Co., Ltd. All Rights Reserved