



FLYINGVOICE VoIP PRODUCT CATALOG

ABOUT FLYINGVOICE

Flyingvoice Network Technology Co., Ltd. (hereinafter referred to as “Flyingvoice”) is a leading supplier of communication terminal devices and VoIP one-stop solutions, providing VoIP phones, ATAs, gateways and routers for business and home. We are aiming to empower small, medium and micro enterprises, solving the problem of “easy to buy but difficult to use” in network and communication, and committed to providing wireless IP office solutions with integrated voice and data for SMEs.


Flyingvoice is a reliable partner who can create a sustainable competitive advantage for your VoIP business. We look forward to a Win-Win partnership with you.



TECHNOLOGY PARTNERS



OUR CLIENTS



Flyingvoice VoIP Phone

Flyingvoice wireless IP phones give you a wireless option for VoIP communications. They do not require a wired connection to make and receive VoIP calls. Flyingvoice's wireless VoIP phones comprise multiple phone models, offering not only desktop IP phone but also cordless IP phone. You can easily find the right IP Phone to meet your business requirements.



Dual Gigabit Ethernet Ports

Easy-grip Handset



IPS Touchable Screen




Dual USB Ports



HD Voice Quality



Concave Buttons



Adjustable
Multi-angle Stand

FIP15G Plus

Elite Touch Screen IP Phone

- 4.3" 480x272-pixel IPS touch screen
- 10 SIP accounts, 64 DSS keys, 64 BLF keys
- 2 x 10/100/1000Mbps Ethernet ports
- Integrated 2.4GHz&5GHz Wi-Fi, PoE
- Wall mountable
- HD voice, 6-way audio conferencing
- 2 x USB port, support USB disks for call recording, or EHS10 headset adapter for DECT wireless headsets

FIP14G

Enterprise GigE IPS Color Screen IP Phone

- 3.5" 480x320-pixel IPS color screen
- 8 SIP accounts, 21 DSS keys, 21 BLF keys
- 2 x 10/100/1000Mbps Ethernet ports
- Integrated 2.4GHz Wi-Fi, PoE
- HD voice, 6-way audio conferencing
- 1 x USB port, support USB disks for call recording, or EHS10 headset adapter for DECT wireless headsets (Flash 32M)



FIP13G

Advanced Business GigE Color Screen IP Phone

- 2.8" 320x240-pixel TN color screen
- 4 SIP accounts, 9 DSS keys, 9 BLF keys
- 2 x 10/100/1000Mbps Ethernet ports
- Integrated 2.4GHz Wi-Fi, PoE
- HD voice, 6-way audio conferencing
- 1 x USB port, support USB disks for call recording, or EHS10 headset adapter for DECT wireless headsets (Flash 32M)



FIP11C / FIP11CP

Basic Business Color Screen IP Phone

- 2.4" 320x240-pixel TN color screen
- 3 SIP accounts, 6 DSS keys, 6 BLF keys
- 2 x 10/100Mbps Ethernet ports
- Integrated 2.4GHz Wi-Fi, PoE (FIP11CP)
- HD voice, 6-way audio conferencing



FIP10 / FIP10P

Entry-level Business IP Phone

- FSTN B/W 128x64-pixel graphic LCD screen
- 2 SIP accounts, 2 DSS keys, 2 BLF keys
- 2 x 10/100Mbps Ethernet ports
- Integrated 2.4GHz Wi-Fi, PoE (FIP10P)
- HD voice, 6-way audio conferencing





FIP16Plus

Portable Business Dual-band IP Phone with Belt Clip

- 1.8" 128x160-pixel TN color screen
- 2 SIP accounts
- Support 2.4GHz & 5GHz Wi-Fi
- HD voice, 3.5mm earphone jack, 6-way audio conferencing
- Support IEEE802.11k/r fast roaming
- 4000mA battery, 12 hours talk time, 120 hours standby time
- IP52 certificated, waterproof, dustproof and shockproof












FIP12WP

Big Button IP Phone for Hospital and Nursing Home

- FSTN B/W 192x64-pixel graphic LCD screen
- 2 SIP accounts, 4 DSS keys
- 2 x 10/100Mbps Ethernet ports
- Integrated 2.4GHz Wi-Fi, PoE
- HD voice, 3-way audio conferencing



Model	FIP15G Plus	FIP14G	FIP13G	FIP11C/FIP11CP	FIP10/FIP10P	FIP16Plus	FIP12WP
Image							
LCD	4.3" IPS Color Graphic LCD	3.5" IPS Color Graphic LCD	2.8" TN Color Graphic LCD	2.4" TN Color Graphic LCD	FSTN B/W Graphic LCD	1.8" TN Color Graphic LCD	FSTN B/W Graphic LCD
Resolution	480x272	480x320	320x240	320x240	128x64	128x160	192x64
LCD Backlight	√	√	√	√	√	√	√
Touch Panel	√	×	×	×	×	×	×
SIP Lines	10	8	4	3	2	2	2
PoE	√	√	√	FIP11CP	FIP10P	×	√
GigE	√	√	√	×	×	×	×
Built-in Wi-Fi	2.4GHz, 5GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz	2.4GHz, 5GHz	2.4GHz
Foot Stand	2	3	3	3	3	×	3
USB 2.0	√	√	√	×	×	×	√
Ethernet Port	2 x 10/100/1000M	2 x 10/100/1000M	2 x 10/100/1000M	2 x 10/100M	2 x 10/100M	×	2 x 10/100M
Handset Port	RJ9	RJ9	RJ9	RJ9	RJ9	×	RJ9
Headset Port	RJ9	RJ9	RJ9	RJ9	RJ9	3.5mm	RJ9
Line Key	10	8	4	3	2	0	2
DSS Key	64	21	9	6	2	0	4
6-Way Conferencing	√	√	√	√	√	√	3-Way Conferencing
HD Voice	HD Speaker, HD Handset	HD Speaker, HD Handset	HD Speaker, HD Handset	HD Speaker, HD Handset	HD Handset	HD Speaker, HD Handset	HD Handset
Wideband Codec	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)
Narrowband Codec	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)
Phonebook	2000	2000	2000	2000	2000	2000	2000
Wall Mount	√	√	√	√	√	×	√



P10/P10P

High Performance Entry-level IP Phone



- 2.3" 132*64px LCD screen with an adjustable backlight
- 2 SIP accounts
- 2 x 10/100Mbps Ethernet ports
- Integrated PoE (P10P only)
- HD voice, 6-way audio conferencing
- Wall mountable
- Stand with 2 adjustable angles
- Local phonebook up to 2000 entries

P11/P11P

Color Screen Entry-level IP Phone

- 2.4" 320*240px color display with an adjustable backlight
- 2 SIP accounts
- 2 x 10/100Mbps Ethernet ports
- Integrated PoE (P11P only)
- HD voice, 6-way audio conferencing
- Wall mountable
- Stand with 2 adjustable angles
- Local phonebook up to 2000 entries



Model	P10/P10P	P11/P11P
Image		
LCD	2.3" LCD screen with an adjustable backlight	2.4" color display with an adjustable backlight
Resolution	132*64px	320*240px
LCD Backlight	√	√
Touch Panel	×	×
SIP Lines	2	2
PoE	P10P	P11P
GigE	×	×
Built-in Wi-Fi	×	×
Foot Stand	Stand with 2 adjustable angles	Stand with 2 adjustable angles
USB 2.0	√	×
Ethernet Port	2 x 10/100M	2 x 10/100M
Handset Port	RJ9	RJ9
Headset Port	RJ9	RJ9
Line Key	×	×
DSS Key	×	×
6-Way Conferencing	√	√
HD Voice	HD Speaker, HD Handset	HD Speaker, HD Handset
Wideband Codec	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)	G.722, Opus, AMR-WB(Optional), G.711WB(Optional)
Narrowband Codec	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)	G.711(A/u), iLBC, G.729A/B, G.723, G.726, AMR-NB(Optional)
Phonebook	2000	2000
Wall Mount	√	√



EHS10

Wireless Headset Adapter


Flyingvoice EHS10 headset adapter creates a solution that allows you to connect to a DECT wireless headset base (**Jabra, Plantronics and Sennheiser**) and a desk phone for remote call management, bringing a seamless calling experience when you roam through the office.



Flyingvoice VoIP Adapter

A VoIP adapter is also known as an Analog Telephone Adapter (ATA) that allows you to use SIP-based VoIP service without having to replace your existing analog equipment, such as analog phone and fax machine. Flyingvoice provides 1-8 FXS/FXO ports adapter models, which are the perfect solution for small businesses or SOHOs in need of a mini-phone system.



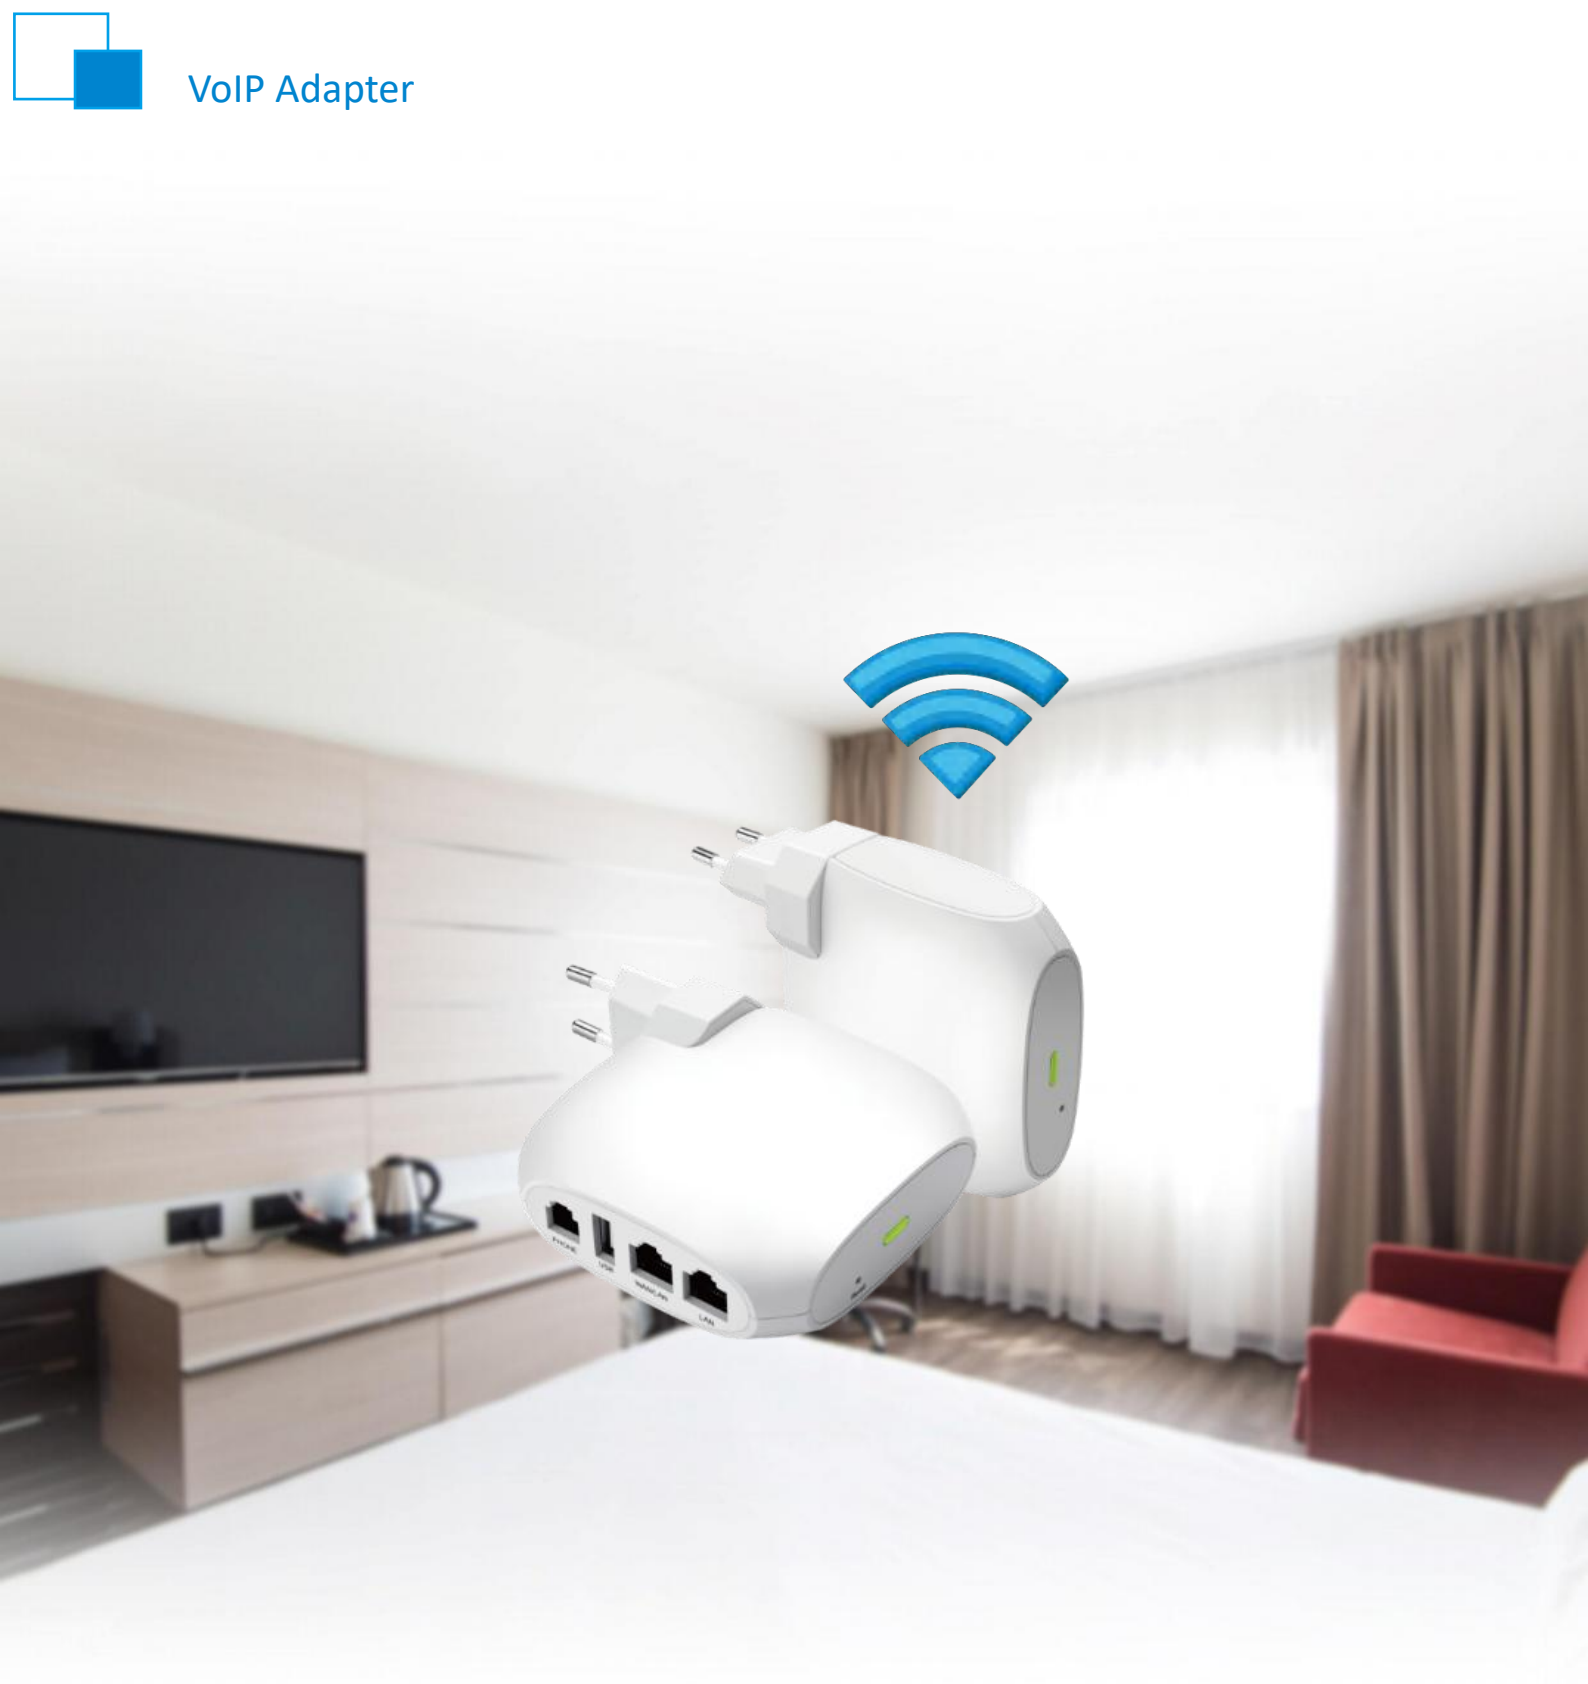

FTA1101

Portable Wireless VoIP Adapter

- Portable & compact, ideal for home and travel use
- 1 x FXS port
- 2 x 10/100Mbps Ethernet ports
- Built-in AP mode allows you to connect wireless IP phone
- 1 x USB port, supports file sharing within LAN
- T.38 and T.30 fax protocols

FTA5111

1 FXS & 1 FXO VoIP Adapter

- 1 x FXS port, 1 x FXO port
- 3 x 10/100Mbps Ethernet ports
- TR069, SNMP
- T.38 and T.30 fax protocols
- QoS



FTA5120

High-Performance 2 FXO VoIP Adapter

- 2 x FXO ports
- 3 x 10/100Mbps Ethernet ports
- Stand-Alone Survivability (SAS)
- TR069, SNMP
- QoS



FTA5101 / FTA5102E2

1/2 FXS VoIP Adapter

- 1/2 x FXS ports
- 3 x 10/100Mbps Ethernet ports
- TR069, SNMP
- T.38 and T.30 fax protocols
- QoS



G504 / G508

4/8 FXS Gigabit VoIP Adapter

- 4/8 x FXS ports
- 2 x 10/100/1000Mbps Ethernet ports
- T.38 and T.30 fax protocols
- TR069, SNMP
- QoS











FGW4148-48S

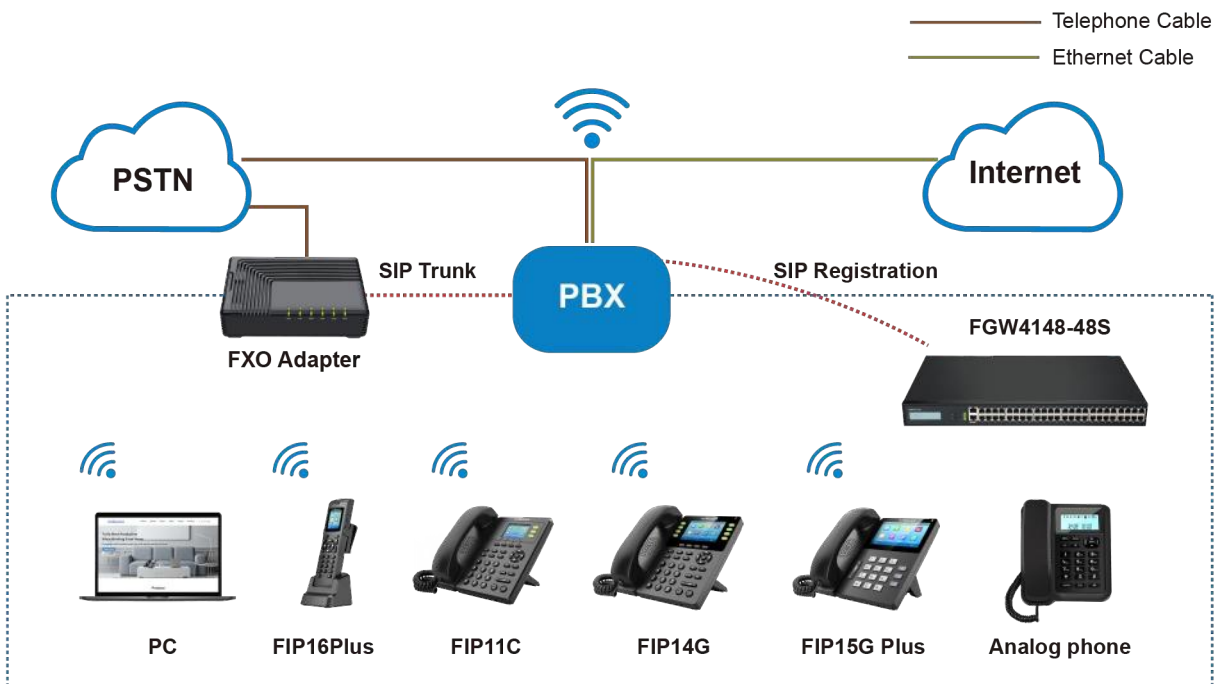48 FXS Advanced VoIP Adapter

- Stability ATA with 48 FXS ports
- PESQ>4.4, advanced acoustic performance
- Flexible voice calls



Model	FTA1101	FTA5111	FTA5120	FTA5101/FTA5102E2	G504/G508
Image					
FXS(RJ11)	1	1	×	1/2	4/8
FXO(RJ11)	×	1	2	×	×
SIP Account	1	1	×	1/2	4/8
Ethernet(RJ45)	2 x 10/100M	3 x 10/100M	3 x 10/100M	3 x 10/100M	2 x 10/100/1000M
Wi-Fi	√	×	×	×	×
2.4GHz Speed	300Mbps	×	×	×	×
USB Port	1	×	×	×	×
AP Mode	√	×	×	×	×
HNAT	×	×	×	×	√
DHCP	Client/Server	Client/Server	Client/Server	Client/Server	Client/Server
SNMP	√	√	√	√	√
TR069	√	√	√	√	√
VLAN	√	√	√	√	√
VPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN
FAX	T.38, T.30	T.38, T.30	×	T.38, T.30	T.38, T.30
3-Way Conferencing	√	√	√	√	√
Voice Codec	G.711, G.723, G.729A, G.729B, iLBC	G.711u/a, G.723, G.729, G.722	G.711u/a, G.723, G.729, G.722	G.711, G.723, G.729A, G.729B, iLBC	G.711, G.723, G.729A, G.729B, iLBC
SIP Protocol	SIPV2.0(RFC3261) /	SIPV2.0(RFC3261) /	SIPV2.0(RFC3261) /	SIPV2.0(RFC3261) /	SIPV2.0(RFC3261) /
Auto Provision	3262/3263/3264) TFTP, HTTP, HTTPS	3262/3263/3264) TFTP, HTTP, HTTPS	3262/3263/3264) TFTP, HTTP, HTTPS	3262/3263/3264) TFTP, HTTP, HTTPS	3262/3263/3264) TFTP, HTTP, HTTPS
Web Management	√	√	√	√	√

Flyingvoice VoIP Router

With various specifications, Flyingvoice VoIP routers provide easy-to-use, flexible and high-performance Internet connectivity for small and medium-sized businesses. Equipped with advanced management protocols such as SNMP and TR-069, which makes them easy to achieve unified deployment and centralized management.





FWR7302

4G-LTE Dual-band Gigabit VoIP Router

- 2 x FXS ports
- Support 2.4GHz & 5GHz Wi-Fi
- 5 x 10/100/1000Mbps Ethernet ports
- 1 x Combo SFP port
- 1 x USB port
- T.38 and T.30 fax protocols



FWR7102

Entry-level 4G-LTE Wireless VoIP Router

- 2 x FXS ports
- Support 2.4GHz 300Mbps Wi-Fi
- 4 x 10/100Mbps Ethernet ports
- T.38 and T.30 fax protocols



FWR9601

Enterprise Dual-band Gigabit Wireless VoIP Router

- 1 x FXS port
- 5 x 10/100/1000Mbps Ethernet ports
- Support 2.4GHz & 5GHz Wi-Fi
- Layer2/3QoS
- T.38 and T.30 fax protocols



FWR8101 / FWR8102

Enterprise Wireless VoIP Router

- 1/2 x FXS ports
- 4 x 10/100Mbps Ethernet ports
- Support 2.4GHz 300Mbps Wi-Fi
- T.38 and T.30 fax protocols








FPX9102H

Multi-function Dual-band Gigabit Router

- 2 x FXO Ports
- 5 x 10/100/1000Mbps Ethernet ports
- Support 2.4GHz&5GHz Wi-Fi
- 1 x USB port
- TR069, SNMP



Model	FWR7302	FWR7102	FWR9601	FWR8101/ FWR8102	FPX9102H
Image					
FXS(RJ11)	2	2	1	1/2	×
FXO(RJ11)	×	×	×	×	2
Ethernet(RJ45)	5 x 10/100/1000M	4 x 10/100M	5 x 10/100/1000M	4 x 10/100M	5 x 10/100/1000M
2.4GHz Speed	300Mbps	300Mbps	300Mbps	300Mbps	300Mbps
5GHz Speed	867Mbps	×	867Mbps	×	867Mbps
4G-LTE	√	√	×	×	×
USB Port	1	×	×	×	1
MU-MIMO	×	×	×	×	×
HNAT	√	√	√	×	√
SNMP	√	√	√	√	√
TR069	√	√	√	√	√
VLAN	√	√	√	√	√
VPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN	PPTP, L2TP, OpenVPN
FAX	T.38, T.30	T.38, T.30	T.38, T.30	T.38, T.30	×
Voice Codec	G.711, G.723, G.729A, G.729B, iLBC	G.711, G.723, G.729A, G.729B, iLBC	G.711, G.723, G.729A, G.729B, iLBC	G.711, G.723, G.729A, G.729B, iLBC	G.711, G.723, G.729A, G.729B, iLBC
SIP Protocol	SIPV2.0(RFC3261/ 3262/3263/3264)	SIPV2.0(RFC3261/ 3262/3263/3264)	SIPV2.0(RFC3261/ 3262/3263/3264)	SIPV2.0(RFC3261/ 3262/3263/3264)	SIPV2.0(RFC3261/ 3262/3263/3264)
Auto Provision	TFTP, HTTP, HTTPS	TFTP, HTTP, HTTPS	TFTP, HTTP, HTTPS	TFTP, HTTP, HTTPS	TFTP, HTTP, HTTPS
Web Management	√	√	√	√	√

FLYINGVOICE

FLYINGVOICE NETWORK TECHNOLOGY CO., LTD.

Website: www.flyingvoice.com | Email: sales@flyingovice.com

